

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl


# klemko®

## 101620 - SP 4685 R

Geïsoleerde kabelschoenen, PVC

Package type: BX á 100 pce

/productimages/101620.jpg

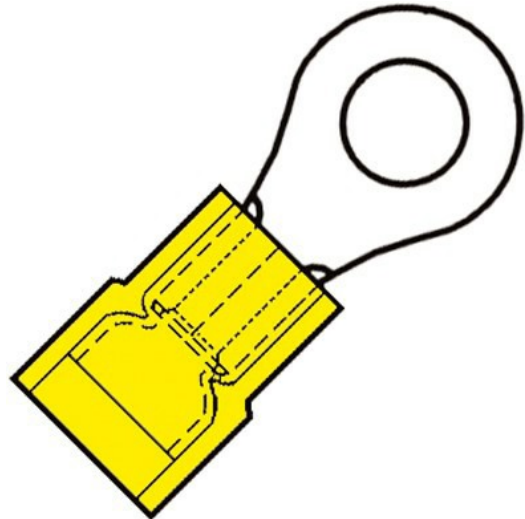

**PRODUCT SPECIFICATIONS:**

|                                            |                          |
|--------------------------------------------|--------------------------|
| Insulated                                  | Yes                      |
| Polyvinyl chloride (PVC)                   |                          |
| Bolt dimension (metric)                    | 8                        |
| Flange shape                               | Ring shape               |
| According to DIN                           | No                       |
| Insulation                                 | Polyvinyl chloride (PVC) |
| Colour insulation                          | Yellow                   |
| Nominal cross section (mm <sup>2</sup> )   | 2.63 - 6.64              |
| Reel/roll packaging                        | No                       |
| Sleeve form                                | Short                    |
| Colour                                     | Yellow                   |
| AWG-range                                  | 14 - 10                  |
| Suitable for solid conductors              | No                       |
| Suitable for stranded conductors           | Yes                      |
| Suitable for fine strand conductors        | Yes                      |
| Suitable for high temperatures (to 650 °C) | No                       |
| Suitable for insulated varnish             | No                       |
| Suitable for round conductors              | Yes                      |
| Suitable for flat conductors               | No                       |
| Temperature protected till (°C)            | 105                      |
| For pull protected connections             | Yes                      |
| Material                                   | Copper                   |
| Surface protection                         | Tinned                   |
| Max. current (I <sub>max</sub> ) (A)       | 50                       |
| Stud size (imperial)                       | Other                    |
| Halogen free                               | No                       |
| Total length (mm)                          | 35.5                     |
| (mm)                                       | 6.5                      |
| (mm)                                       | 15                       |
| (mm)                                       | 35.5                     |
| Amperage (A)                               | 48                       |
| (V)                                        | 600                      |
| Temperature (°C)                           | 75                       |
| Yes                                        |                          |
| No                                         |                          |
| Packaging                                  | Bag                      |
| Watertight                                 | No                       |
| No                                         |                          |
| No                                         |                          |
| No                                         |                          |