

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl


klemko®

156402 - SP 1530 R-NY-NY

Geïsoleerde kabelschoenen, Nylon

Package type: BX á 100 pce

/productimages/156402.jpg

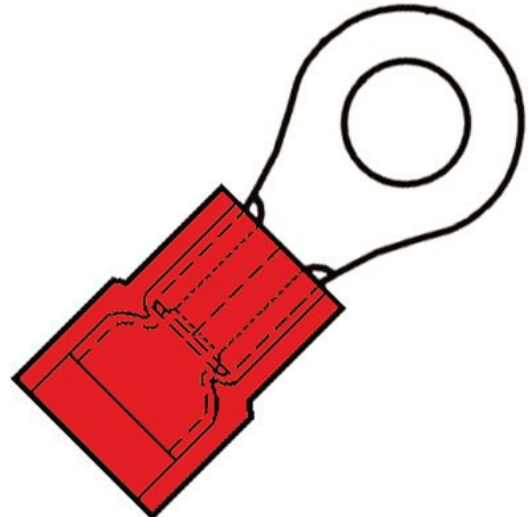

PRODUCT SPECIFICATIONS:

Insulated	Yes
PA	
Bolt dimension (metric)	3
Flange shape	Ring shape
According to DIN	No
Insulation	Polyamide (PA)
Colour insulation	Red
Nominal cross section (mm ²)	0.34 - 1.65
Reel/roll packaging	No
Sleeve form	Short
Colour	Red
AWG-range	22 - 16
Suitable for solid conductors	No
Suitable for stranded conductors	Yes
Suitable for fine strand conductors	Yes
Suitable for high temperatures (to 650 °C)	No
Suitable for insulated varnish	No
Suitable for round conductors	Yes
Suitable for flat conductors	No
Temperature protected till (°C)	105
For pull protected connections	Yes
Material	Copper
Surface protection	Tinned
Max. current (I _{max}) (A)	19
Stud size (imperial)	Other
Halogen free	Yes
Total length (mm)	18.5
(mm)	1.7
(mm)	5.5
(mm)	18.5
Amperage (A)	19
(V)	600
Temperature (°C)	105
Yes	
No	
Packaging	Bag
Watertight	No
No	
No	
Yes	