

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl


klemko®

156405 - SP 1532 R-NY- NY

Geïsoleerde kabelschoenen, Nylon

Package type: BX á 100 pce

/productimages/156405.jpg

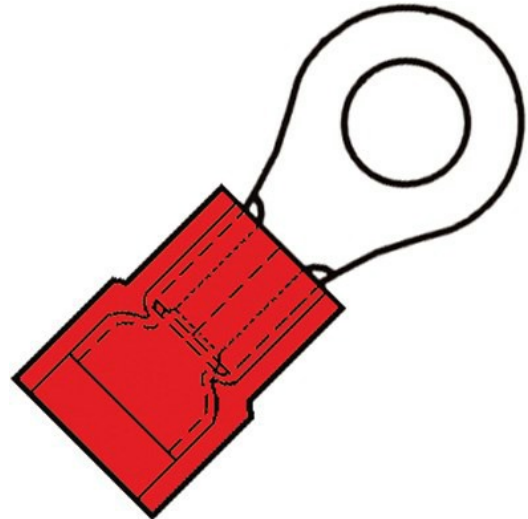

PRODUCT SPECIFICATIONS:

PA	
Bolt dimension (metric)	3.5
Flange shape	Ring shape
Insulation	Polyamide (PA)
Insulated	Yes
Colour insulation	Red
Nominal cross section (mm ²)	0.34 - 1.65
Reel/roll packaging	No
Sleeve form	Short
Colour	Red
Suitable for solid conductors	No
Suitable for stranded conductors	Yes
Suitable for fine strand conductors	Yes
Suitable for high temperatures (to 650 °C)	No
Suitable for insulated varnish	No
Suitable for round conductors	Yes
Suitable for flat conductors	No
Temperature protected till (°C)	105
For pull protected connections	Yes
Material	Copper
Surface protection	Tinned
Max. current (I _{max}) (A)	19
Stud size (imperial)	Other
Halogen free	Yes
Total length (mm)	20.4
(mm)	4.1
(mm)	6.6
(mm)	20.4
Amperage (A)	19
(V)	600
Watertight	No
Yes	
Yes	
No	