

Klemko Techniek B.V.  
Phone: +31 (0)880023300  
E-mail: info@klemko.nl


# klemko®

## 157605 - A 2512 R-NY

Geïsoleerde kabelschoenen, Nylon

Package type: BX á 100 pce

/productimages/157605.jpg

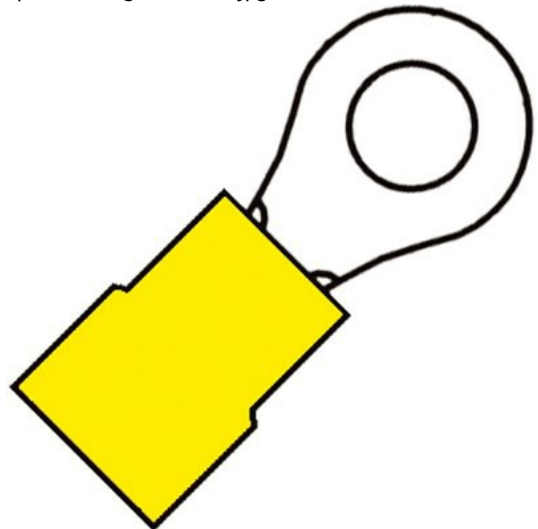

## PRODUCT SPECIFICATIONS:

|                                            |                |
|--------------------------------------------|----------------|
| Insulated                                  | Yes            |
| PA                                         |                |
| Bolt dimension (metric)                    | 12             |
| Flange shape                               | Ring shape     |
| According to DIN                           | No             |
| Insulation                                 | Polyamide (PA) |
| Colour insulation                          | Yellow         |
| Nominal cross section (mm <sup>2</sup> )   | 25 - 25        |
| Reel/roll packaging                        | No             |
| Sleeve form                                | Short          |
| Colour                                     | Yellow         |
| AWG-range                                  | 4 - 4          |
| Suitable for solid conductors              | No             |
| Suitable for stranded conductors           | Yes            |
| Suitable for fine strand conductors        | Yes            |
| Suitable for high temperatures (to 650 °C) | No             |
| Suitable for insulated varnish             | No             |
| Suitable for round conductors              | Yes            |
| Suitable for flat conductors               | No             |
| Temperature protected till (°C)            | 105            |
| For pull protected connections             | No             |
| Material                                   | Copper         |
| Surface protection                         | Tinned         |
| Max. current (I <sub>max</sub> ) (A)       | 125            |
| Stud size (imperial)                       | Other          |
| Halogen free                               | Yes            |
| Total length (mm)                          | 42.5           |
| (mm)                                       | 7.7            |
| (mm)                                       | 22             |
| (mm)                                       | 42.5           |
| Amperage (A)                               | 48             |
| (V)                                        | 600            |
| Temperature (°C)                           | 105            |
| No                                         |                |
| No                                         |                |
| Packaging                                  | Bag            |
| Watertight                                 | No             |
| No                                         |                |
| No                                         |                |
| No                                         |                |