

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

866090 - LA-PI-ALU42WH-B

Led armatuur plafond inbouw


Package type: CT á 1 pce

/productimages/866090.jpg



PRODUCT SPECIFICATIONS:

Spot	
Mounting method	Built-in
Dimmable	Yes
Colour temperature (K)	6000 - 6000
Colour of light adjustable	No
Rated luminous flux according to IEC 62722-2-1 (lm)	150
(lm/W)	0 - 0
Nominal current (mA)	0 - 700
Nominal voltage (V)	3 - 3
Voltage type	DC
Max. system power (W)	2.1
Energy efficiency class of the light source according to EU regulation 2019/2015	G
Beam angle	Wide beam 41-80°
Beam angle (°)	60
Built-in height (mm)	50 - 50
Height/depth (mm)	52
Outer diameter (mm)	42
Built-in diameter (mm)	37 - 37
Housing colour	Aluminium
Degree of protection (IP), front side	IP44
IP20	
Degree of protection (IP)	IP44
Suitable for ceiling mounting	Yes
Luminous flux adjustable	Continuously variable
Suitable for lamp power (W)	2.1 - 2.1
Suitable for clamp-mounting	Yes
Adjustability	not adjustable
Lamp type	LED not exchangeable
With light source	Yes
Electrical connection with connector system	Yes
Type of control gear	LED operating device current-controlled
With control gear	No
Colour of light	White
Housing material	Aluminium
Light sharing	Symmetric
Colour rendering index CRI	80-89
Suitable for built-in mounting	Yes
Optics	Lens
Material cover	Plastic, opal
Light distributor	Diffuser lens/optic/panel
Light outlet	Direct
Number of poles	2

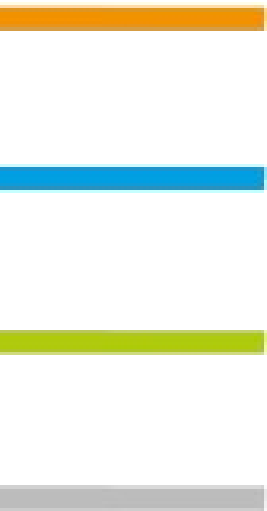

Colour consistency (McAdam ellipse)	SDCM2
With mounting bracket	No
With presence indicator	No
(lm)	0 - 150