

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

/productimages/868233.jpg


Lumiko modulair i-trackspots

Package type: CT á 1 pce



PRODUCT SPECIFICATIONS:

Colour temperature (K)	4000 - 4000
Luminous flux (lm)	3500 - 3500
Luminaire efficacy (lm/W)	106
Suitable for lamp power (W)	33.4 - 33.4
Max. system power (W)	33.4
Nominal voltage (V)	230 - 230
Suitable for ceiling mounting	Yes
Suitable for light-track mounting	Yes
Suitable for clamp-mounting	No
Adjustability	Rotating and swivelling
With movement sensor	No
With light sensor	No
Lamp type	LED not exchangeable
With light source	Yes
Electrical connection with connector system	Yes
Degree of protection (IP)	IP20
Type of control gear	LED operating device current-controlled
With control gear	Yes
Housing material	Aluminium
Housing colour	White
Rated luminous flux according to IEC 62722-2-1 (lm)	3500
Light sharing	Symmetric
Beam angle	Medium beam 21-40°
Length (mm)	107
Width (mm)	107
Beam angle (°)	30
Height/depth (mm)	210
(mm)	90
Outer diameter (mm)	107
Voltage type	AC
Colour of light	White
Colour rendering index CRI	90-100
Suitable for built-in mounting	No
Optics	Lens
Suitable for low voltage cable system	No
Yes	
Surface protection	Powder coating
Surface brushed	No
Dimming 0-10 V	No
Dimming 1-10 V	No

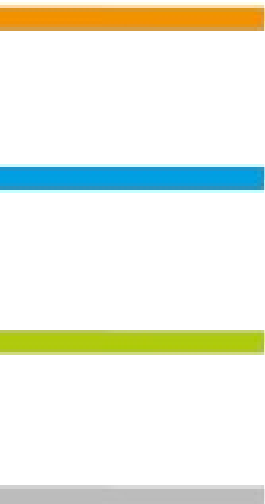

Dimming DALI	No
Dimming DMX	No
Dimming DSI	No
Dimming potentiometer (integrated)	No
Dimming LineSwitch	No
Dimming manufacturer's proprietary system	No
Dimming mains voltage modulation	No
Dimming phase cut-off	No
Dimming phase cut-on	No
Dimming programmable	No
Dimming RF	No
Dimming Sine Wave Reduction	No
Dimming Touch and Dim	No
Dimming Zigbee	No
Dimming with push-button	No
Light distributor	Focal lens
Light outlet	Direct
Number of poles	3
Connection type	Busbar adapter
Emergency power supply integrated	No
Dimming DALI-2	No
Colour of light adjustable	No
Luminous flux adjustable	No
With mounting bracket	No
Energy efficiency class of the light source according to EU regulation 2019/2015	E