

Klemko Techniek B.V.
Phone: +31 (0)880023300
E-mail: info@klemko.nl

klemko®

868682 - LD-7W-RK78-WW

Lumiko modulair spots


Package type: CT á 1 pce

/productimages/868682.jpg



PRODUCT SPECIFICATIONS:

Spot	
Mounting method	Built-in
Dimmable	Yes
Colour temperature (K)	3000 - 3000
Colour of light adjustable	No
Dimming phase cut-off	Yes
Luminous flux (lm)	0 - 650
Rated luminous flux according to IEC 62722-2-1 (lm)	650
(lm)	0 - 829
Nominal current (mA)	0 - 700
Nominal voltage (V)	9.4 - 9.4
Voltage type	DC
Max. system power (W)	6.6
Energy efficiency class of the light source according to EU regulation 2019/2015	D
Beam angle	Medium beam 21-40°
Beam angle (°)	30
Built-in depth (mm)	62
(mm)	44
Outer diameter (mm)	78
Built-in diameter (mm)	67 - 67
Housing colour	White
Degree of protection (IP), front side	IP20
IP20	
Degree of protection (IP)	IP20
Suitable for ceiling mounting	Yes
Suitable for suspended mounting	No
Suitable for wall mounting	No
Luminous flux adjustable	Continuously variable
Suitable for lamp power (W)	6.6 - 6.6
Adjustability	Swivelling
With movement sensor	No
With light sensor	No
Lamp type	LED exchangeable
With light source	Yes
Electrical connection with connector system	Yes
Type of control gear	LED operating device current-controlled
With control gear	Yes
Colour of light	White
Housing material	Aluminium
Reflector	High-gloss
Light sharing	Symmetric
Colour rendering index CRI	80-89

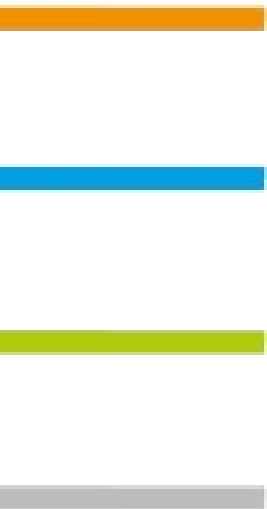

Suitable for surface mounting	No
Suitable for built-in mounting	Yes
Optics	Reflector
Yes	
(cm)	50
Dimming phase cut-on	No
Light distributor	Reflector
Reflector colour	Silver
Light outlet	Direct
Number of poles	2
With mounting bracket	No
Dimming manufacturer's proprietary system	No
None	